



### Product description

Wall mounted push button operated water dispenser

Tap activated by pushbutton

AISI 304 stainless steel. Brushed finish

Water inlet, outlet and power supply are required

Easily regulated water temperature (thermostat)

### Technical specifications:

Fresh water with tap activated by pushbutton. Exterior & interior body made of AISI 304 stainless steel. Anti-vandalism shell on the tap to provide a higher hygienic protection. Easily regulated temperature between 4 and 11 °C by a thermostat. Water tank capacity of 4,5 l with a cooling capacity of 30 l/h and a water flux speed of 60l/h. Optional active carbon filter. The total cooling power is 350 W with an electrical consumption of 200 W. CFC's free refrigerated gas, R134A. A ½" water inlet and an outlet of Ø30mm. The measures of the product are 525x360x360mm and its total net weight is 23Kg. Adequate for highly frequently use public interior spaces. The reference of the product is GW10.02.04.02 manufactured by GENWEC S.L. – Avd. Joan Carles I, 46-48 L'Hospitalet de Llobregat - Barcelona. www.genwec.com.

### Technical features:


#### Product specifications

- Fully made of AISI304 stainless steel (exterior / interior)
- Voltage: 220-240V
- Frequency: 50/60Hz
- Cooling power: 350W
- Electrical consumption: 200W
- Cooling capacity: 30 l/h
- Water flux speed: 60l/h
- Water output temperature: 4-11°C
- Refrigerant gas: R-134A
- Water tank capacity: 4,5l

#### Packaging specifications

- Individual package: Individual carton and expanded polystyrene protections
- Package measures: 710 x 415 x 385 mm
- Weight of individual package: 24.5 Kg
- Product measures: : 525 x 360 x 360 mm
- Product weight: 23 Kg
- Units per carton: 1
- Units per pallet: 12 (\*)

(\*)Height below 1,1m.

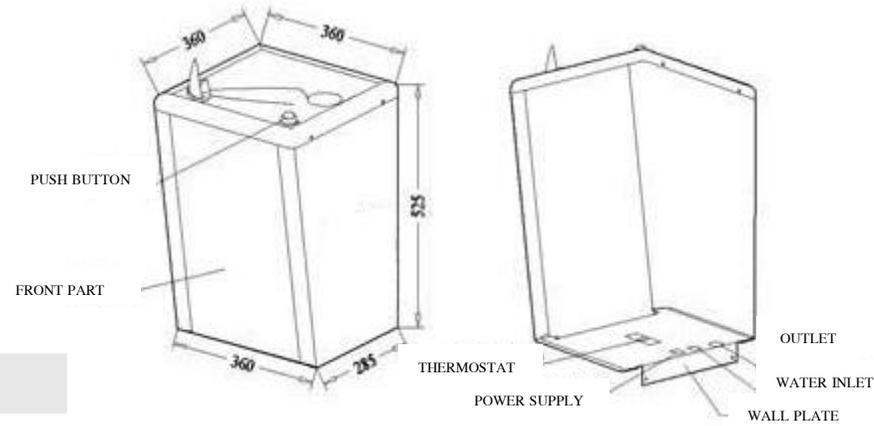

**Certificates:**

ISO9001:2008, CE.

**Cleaning:** A damp cotton cloth with soapy water is recommended. Allow to dry.