
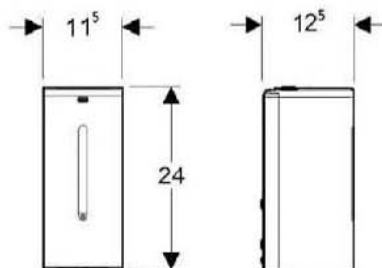


SD920

Wall Mount Automatic Sensor Soap Dispenser

Stainless Steel • Capacity 1000ml • DC9V

Specification



| Specification | | Specification Details | Content |
|---------------|------|-------------------------------------|---|
| General | 1.1 | Warranty | One Year against defect |
| | 1.2 | Duration | min. 13,000 cycles/ AA*6 Alkaline battery |
| | 1.3 | Activated Mode (Auto/Manual) | Infrared Sensor Automatic |
| Ambiance | 2.1 | Ambient Temp. Range | 5~40 degree C |
| | 2.2 | Ambient Humidity Range | 20~90% |
| Appearance | 3.1 | Dimensions | 115Wx240Hx125D |
| | 3.2 | Material | Stainless Steel |
| | 3.3 | Color | S.S. |
| | 3.4 | Water & Humidity Resistance | IP43 |
| | 3.5 | Cover Open Tool | Metal lock (brass key) |
| | 3.6 | Installation/Tool | Driver |
| Electronic | 4.1 | Power type | DC |
| | 4.2 | Power Specification (power input) | DC 9V |
| | 4.3 | Battery Type/Numbers | Alkaline AA x 6 |
| | 4.4 | Stand-by Current | Less than 50 uA |
| | 4.5 | Active Current | Less than 380mA when activating, less than 80mA after activating. |
| | 4.6 | Adjustable Sensing Distance | Auto |
| | 4.7 | Adjustable Sensing Method | Automatic Adjustable |
| | 4.8 | Sensor bouncing Range | Less than 3 cm |
| | 4.9 | Required Sensing Time for Operation | 0.5 ~ 1 sec |
| | 4.10 | Indicator | LED Spotlight if sensing , Flash For Battery Low |
| Soap Related | 5.1 | Supply Type | Soap Tank |
| | 5.2 | Adjustable Drop Size | Random quantity adjustable by Button Switch (max 5sec) |
| | 5.3 | Capacity | 1,000 ml (cc) |
| | 5.4 | Material | HDPE |
| | 5.5 | Dispenser Way | Drop Type |
| | 5.6 | Viscosity | 1 ~ 3500 mPa.S [Remark 1] |